


## 100G CLR4 QSFP28 Optical Transceivers

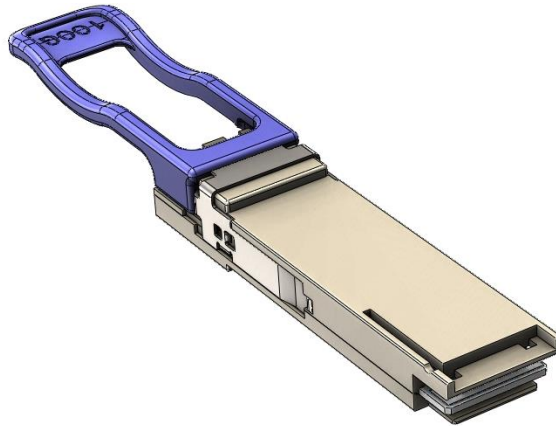

### Product Introduction

Accelink's 100G QSFP28 CLR4 module is designed to meet the requirements of optical fiber interface for 2km reach over duplex SMF in data centers. It is a cost-effective, low power CWDM optical transceiver with high port densities and compact size. Each transceiver incorporates four direct modulated lasers with driver ICs, four PIN diodes with TIAs, and two Mux/De-Mux blocks in a highly integrated CWDM configuration for operation over duplex LC connectors. Mechanical dimensions, connectors and the footprint of this product is QSFP+ specifications compliant.

### Features

- Single channel rate up to 25.8Gbps
- Transmission distance up to 2km
- Compliant with QSFP+ specifications
- 4 CWDM uncooled DML lasers
- Duplex LC connectors
- Single +3.3V power supply
- Low power consumption less than 3.5W
- Operating temperature range: 0°C ~ +70°C
- Compliant with RoHS6

### Applications

- 100G Ethernet
- Data Center Networking

### Standards

- QSFP28:SFF-8665,SFF-8679, SFF-8636
- IEEE802.3bm
- 100G CLR4 Specifications Rev. 1.3

### Specifications

Parameter	Symbol	Unit	Specifications
-----------	--------	------	----------------

			Min	Typ	Max
Tx					
Center wavelength		nm	1264.5 1284.5 1304.5 1324.5		1277.5 1297.5 1317.5 1337.5
Signaling rate, per lane		Gbit/s	25.78125±100ppm		
Operating link reach		km	0.002		2
Optical modulation amplitude, per lane	OMA	dBm	-4		2.5
Transmitter and dispersion penalty, per lane	TDP	dB			3
Optical extinction ratio	ER	dB	3.5		
Average launch power, per lane		dBm	-6.5		2.3
Average launch power of OFF transmitter, per lane		dBm			-30
Transmitter reflectance		dB			-12
Relative intensity noise	RIN	dB/Hz			-130
Rx					
Center wavelength		nm	Same as Tx		
Signaling rate, per lane		Gbit/s	Same as Tx		
Damage threshold	DT	dBm	3.3		
Average launch power, per lane		dBm	-10		2.3
Receive Power(OMA) per lane		dBm			3.0
Receive Sensitivity(OMA) per lane <sup>1</sup>		dBm			-8.5
Receiver reflectance		dB			-26
LOS De-Assert (OMA)	LOSD	dBm	-30		-17
LOS Assert (OMA)	LOSA	dBm			-16

Note: 1 At TP2. 2 PRBS2<sup>31</sup>-1 and BER<1E-12

### Ordering Information

Part No.	Specifications									Application
	Package	Datarate (Gb/s)	Laser	Optical Power (dBm)	Detector	Sensitivity (OMA) dBm	Top	Reach (m)	Other	
RTXM420-430	QSFP28	4*25.78	DFB	-6.5~2.3	PIN	-8.5	0~70°C	2000	DDM	100G CLR4

### Electric Ports Definition

Parameter	Symbol	Unit	Min	Typ	Max
Supply Voltage	V <sub>CC</sub>	V	3.14	3.3	3.47
Supply Current	I <sub>CC</sub>	mA			1000
Transmitter					

Input Differential Impedance	$R_{IN}$	$\Omega$	90	100	100
Single Ended Data Input Swing	$V_{IN}$	mVp-p	350		800
Transmit Disable Voltage	$V_{DIS}$	V	2		3.5
Transmit Enable Voltage	$V_{EN}$	V	-0.3		0.8
Transmit Fault Assert Voltage	$V_{FA}$	V	2		3.5
Transmit Fault De-Assert Voltage	$V_{FDA}$	V	-0.3		0.8
Receiver					
Single Ended Data Output Swing	$V_{OD}$	mVp-p	185		900
LOS Fault	$V_{LOSFT}$	V	2		3.5
LOS Normal	$V_{LOSNR}$	V	-0.3		0.8