


10Gb/s 40Km SFP+ 1550nm Transceiver RTXM228-410

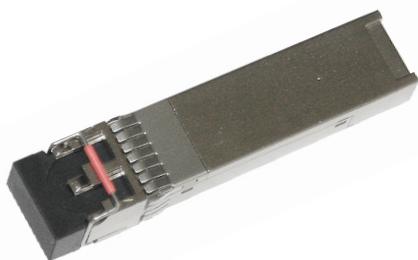

The RTXM228-410 transceivers are designed to transmit and receive serial optical data over 40km single mode optical fiber.

They are compliant with SFF-8431, SFF-8432, 10GFC and 10GBASE-ER/EW. The transmitter converts serial CML electrical data into serial optical data compliant with the IEEE 802.3ae standard. The receiver converts serial optical data into serial CML electrical data. Digital diagnostics functions are available via a 2-wire serial interface, as specified in SFF-8472.

Features

- Operating data 1.25 to 11.3Gbps
- Cooled 1550nm EML laser
- High sensitivity PIN photodiode and TIA
- LC duplex connector
- Hot-pluggable 20 pin connector
- Power consumption <1.5W
- -5°C to 70°C case temperature range
- Single +3.3V power supply
- Fully RoHS Compliant
- All metal housing for superior EMI performance

Applications

- 10GBASE-ER/EW
- 10G Fiber Channel

Standards

- IEEE 802.3 10G BASE-ER/EW
- SFF-8431 & SFF-8432 & SFF-8472

Specifications

(Tc=-5 °C to 70 °C and Vcc= 3.14 to 3.46V)

| Parameter | Symbol | Unit | Min | Typ | Max | Note |
|---|-----------------|-------|------|-----|-------|------|
| Transmitter | | | | | | |
| Nominal Wavelength | λ | nm | 1530 | | 1565 | |
| Side Mode Suppression Ratio | SMSR | dB | 30 | | | |
| Spectral Width(-20dB) | $\Delta\lambda$ | nm | | | 0.5 | |
| Optical Output Power | Pav | dBm | -4.7 | | 4 | |
| Extinction Ratio | ER | dB | 6 | | | |
| Transmitter and Dispersion Penalty | TDP | dB | | | 3 | 1 |
| Average Launch Power of OFF Transmitter | POFF | dBm | | | -30 | |
| Relative Intensity Noise | RIN | dB/Hz | | | -128 | |
| Receiver | | | | | | |
| Center Wavelength | λ_C | nm | 1260 | | 1620 | |
| Receiver Sensitivity | RSEN | dBm | | | -15.8 | 2 |
| Receiver Sensitivity(OMA) | RSEN | dBm | | | -14.1 | 2 |
| Overload | | dBm | -1 | | | |
| Optical Return Loss | | dB | 27 | | - | |
| LOS Assert | LOSA | dBm | -30 | | | |
| LOS De-Assert LOS | LOSD | dBm | | | -17 | |
| LOS Hysteresis | | dB | 0.5 | | 6 | |

Note:

1. Dispersion Penalty at BER= 1×10^{-12} , 10.3125Gbps, PRBS $2^{31}-1$, 40km Fiber.

2. Sensitivity for 10.3125G PRBS $2^{31}-1$ and BER better than or equal to $10E^{-12}$.

10Gb/s 40Km SFP+ 1550nm Transceiver RTXM228-410

Ordering Information

| Part No. | Specifications | | | | | | | | | Application |
|-------------|----------------|---------------|------------|---------------|----------|-------------|--------|-------|-------|------------------------------------|
| | Package | Data rate | Laser | Optical Power | Detector | Sensitivity | Temp | Reach | Other | |
| RTXM228-410 | SFP+ | 1.25 to 11.3G | 1550nm EML | -4.7 ~+4dBm | PIN | < -15.8dBm | -5~70℃ | 40km | DDM | 10GBASE-ER/EW 10G Fiber Channel |

Block diagram

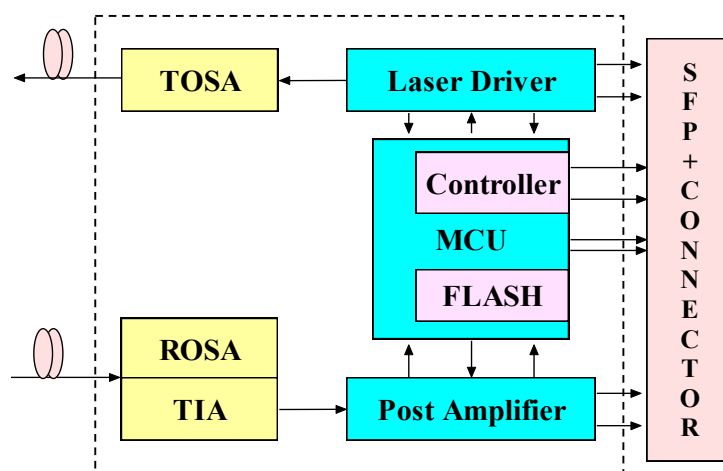


Figure 1. Transceiver functional diagram

Absolute Maximum Ratings

| Parameter | Symbol | Unit | Min | Max |
|---------------------------|--------|------|-----|-----|
| Storage Temperature Range | Ts | ℃ | -40 | 85 |
| Relative Humidity | RH | % | 0 | 95 |

Recommended Operating Conditions

| Parameter | Symbol | Unit | Min | Typ | Max |
|----------------------------------|--------|------|------|-----|-------------------|
| Operating Case Temperature Range | Tc | ℃ | -5 | | 70 |
| Power Supply Voltage | Vcc | V | 3.14 | 3.3 | 3.46 |
| Bit Rate | BR | Gb/s | | | 11.3 |
| Bit Error Ratio | BER | | | | 10 ⁻¹² |
| Max Supported Link Length | L | Km | | | 40 |

10Gb/s 40Km SFP+ 1550nm Transceiver RTXM228-410

Electric Ports Definition

| Parameter | Symbol | Unit | Min | Typ | Max | Note |
|----------------------------------|-------------|----------|----------|-----|--------------|------|
| Supply Voltage | V_{CC} | V | 3.14 | 3.3 | 3.46 | |
| Power Consumption | P | W | | | 1.5 | |
| Transmitter | | | | | | |
| Input Differential Impedance | R_{IN} | Ω | 80 | 100 | 120 | |
| Differential Data Input | V_{IN} | mVp-p | 180 | | 700 | |
| Transmit Disable Voltage | V_{DIS} | V | 2 | | V_{CCHOST} | |
| Transmit Enable Voltage | V_{EN} | V | V_{EE} | | $V_{EE}+0.8$ | |
| Transmit Fault Assert Voltage | V_{FA} | V | 2 | | V_{CCHOST} | |
| Transmit Fault De-Assert Voltage | V_{FDA} | V | V_{EE} | | $V_{EE}+0.4$ | |
| Receiver | | | | | | |
| Differential Data Output | V_{OD} | mVp-p | 300 | | 850 | |
| Output Rise Time | t_{RISE} | pS | 28 | | | |
| Output Fall Time | t_{FALL} | pS | 28 | | | |
| LOS Fault | V_{LOSFT} | V | 2 | | V_{CCHOST} | |
| LOS Normal | V_{LOSNR} | V | V_{EE} | | $V_{EE}+0.4$ | |

Pin function definitions

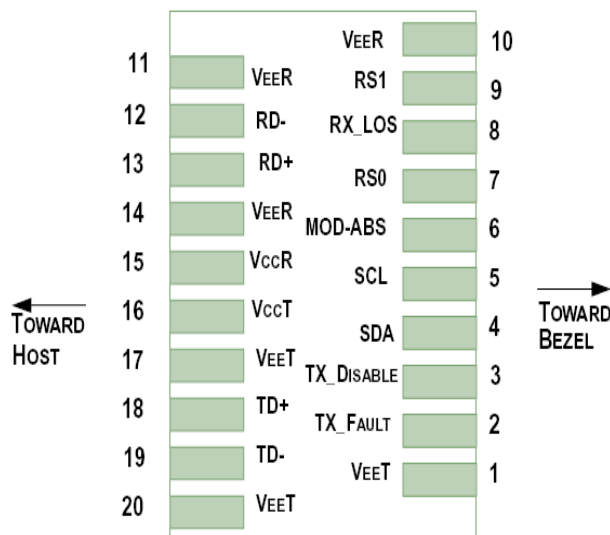


Figure 2.Pin function definitions

Table 1: Transceiver pin descriptions

| Pin Number | Symbol | Name | Description |
|------------|-----------|---------------------------|--|
| 1,17,20 | $V_{EE}T$ | Transmitter Signal Ground | These pins should be connected to signal ground on the host board. |


10Gb/s 40Km SFP+ 1550nm Transceiver

RTXM228-410


| | | | |
|----------|------------|------------------------------------|--|
| 2 | TX Fault | Transmitter Fault Out (OC) | Logic "1" Output = Laser Fault (Laser off before t _{fault}) Logic "0" Output = Normal Operation This pin is open collector compatible, and should be pulled up to Host Vcc with a 10kΩ resistor. |
| 3 | TX Disable | Transmitter Disable In (LVTTL) | Logic "1" Input (or no connection) = Laser off Logic "0" Input = Laser on This pin is internally pulled up to VccT with a 10 kΩ resistor. |
| 4 | SDA | Module Definition Identifiers | Serial ID with SFF 8472 Diagnostics |
| 5 | SCL | | Module Definition pins should be pulled up to Host Vcc with 10 kΩ resistors. |
| 6 | MOD-ABS | | |
| 7 | RS0 | Receiver Rate Select (LVTTL) | These pins have an internal 30kΩ pull-down to ground. A signal on either of these pins will not affect module performance. |
| 9 | RS1 | Transmitter Rate Select (LVTTL) | |
| 8 | LOS | Loss of Signal Out (OC) | Sufficient optical signal for potential $BER < 1 \times 10^{-12}$ = Logic "0" Insufficient optical signal for potential $BER < 1 \times 10^{-12}$ = Logic "1" This pin is open collector compatible, and should be pulled up to Host Vcc with a 10kΩ resistor. |
| 10,11,14 | VeeR | Receiver Signal Ground | These pins should be connected to signal ground on the host board. |
| 12 | RD- | Receiver Negative DATA Out (CML) | Light on = Logic "0" Output Receiver DATA output is internally AC coupled and series terminated with a 50Ω resistor. |
| 13 | RD+ | Receiver Positive DATA Out (CML) | Light on = Logic "1" Output Receiver DATA output is internally AC coupled and series terminated with a 50Ω resistor. |
| 15 | VccR | Receiver Power Supply | This pin should be connected to a filtered +3.3V power supply on the host board. See Figure 3.Recommended power supply filter |
| 16 | VccT | Transmitter Power Supply | This pin should be connected to a filtered +3.3V power supply on the host board. See Figure 3.Recommended power supply filter |
| 18 | TD+ | Transmitter Positive DATA In (CML) | Logic "1" Input = Light on Transmitter DATA inputs are internally AC coupled and terminated with a differential 100Ω resistor. |
| 19 | TD- | Transmitter Negative DATA In (CML) | Logic "0" Input = Light on Transmitter DATA inputs are internally AC coupled and terminated with a differential 100Ω resistor. |

10Gb/s 40Km SFP+ 1550nm Transceiver RTXM228-410

Typical Application Circuit

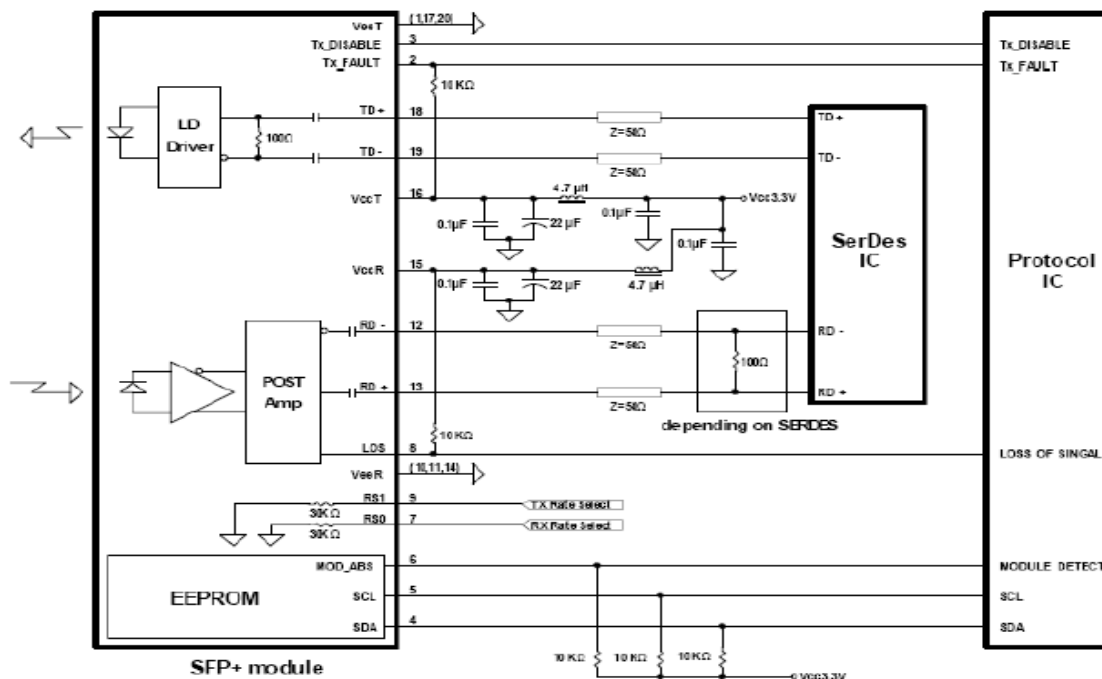

Package Outline

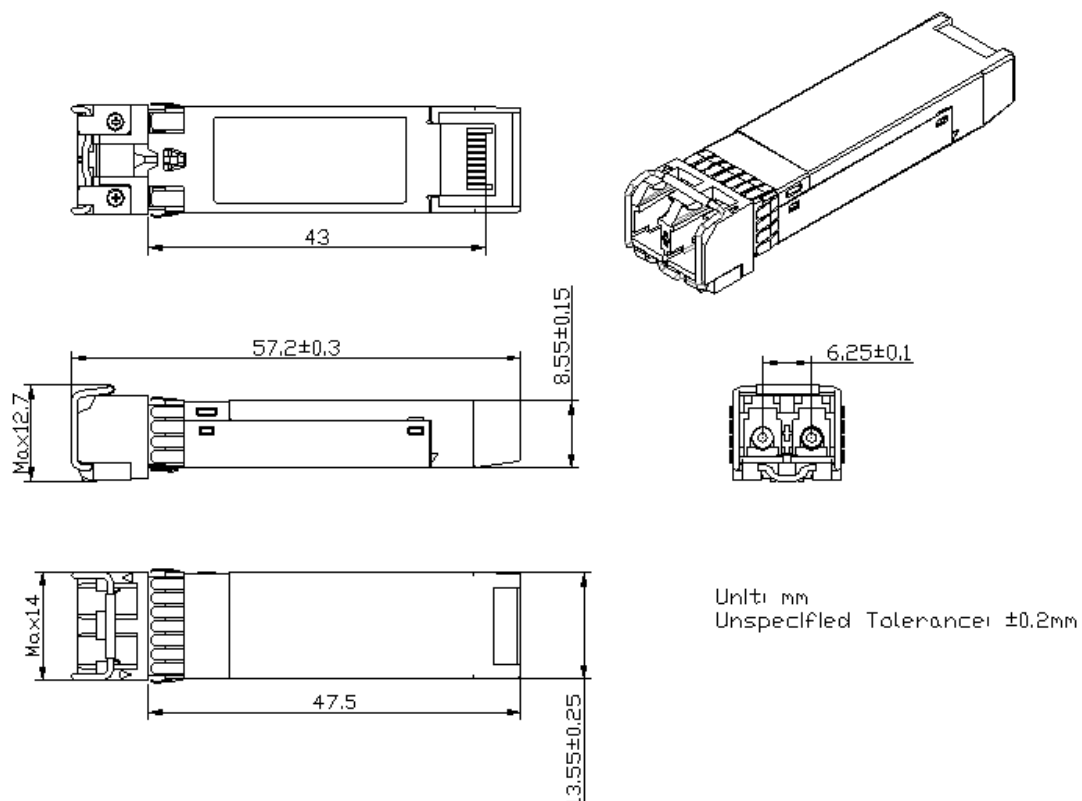

10Gb/s 40Km SFP+ 1550nm Transceiver RTXM228-410

Regulatory Compliance

| Feature | Test Method | Performance |
|---|--|--|
| Electrostatic Discharge (ESD) to the Electrical Pins | MIL-STD-883C Method 3015.4 | Class1 (>1KV) for high speed I/O pins Class 1 (> 2KV) for all other pins |
| Electrostatic Discharge (ESD) to the Duplex LC Receptacle | Variation of IEC 61000-4-2 | The SFP+ modules meet ESD requirements given in EN61000-4-2, criterion B test specification such that units are subjected to 15kV air discharges during operation and 8kV direct contact discharges to the case. |
| Electromagnetic Interference (EMI) | CISPR22 ITE Class B EN55022 Class B | Compliant with standards |
| EMC | | FCC Class B/CE Class B |
| Immunity | IEC61000-4-3 Class 2 EN55024 | Typically show no measurable effect from a 3V/m field swept from 80 to 1000MHz applied to the transceiver without a chassis enclosure. |
| RoHS Compliance | | Less than 1000 ppm of cadmium, lead, mercury, hexavalent chromium, polybrominated biphenyls, and polybrominated biphenyl ethers. |