


10Gb/s 40Km CWDM SFP+ Transceivers RTXM228-29X

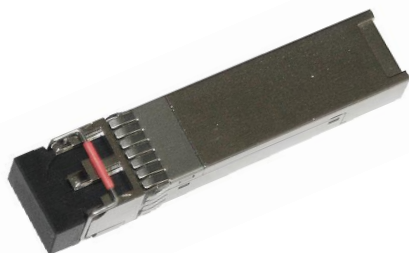

Features

- Compliant to SFP+ MSA
- Fully RoHS Compliant
- All metal housing for superior EMI performance
- CDR with 9.95 to 11.3Gbps
- CWDM-rated Cooled EML DFB Laser
- High sensitivity PIN photodiode and TIA
- LC duplex connector
- Hot pluggable 20pin connector
- Low power consumption <1.8W
- -5°C to 70°C operating wide temperature range
- Single +3.3V power supply
- Digital Monitoring SFF-8472 Rev 10.2 compliant
- Real time monitoring of:
Transmitted optical power
Received optical power
Laser bias current
Temperature
Supply voltage

Applications

- 10G SONET&SDH
- 10GBASE-ER/EW
- 10G Fiber Channel

The CWDM-rated cooled EML laser based 10G SFP+ Transceiver is designed to transmit and receive serial optical data over 40km single mode optical fiber.

They are compliant with SFF-8431, SFF-8432, 10GFC Rev 4.0 and 10GBASE-ER/EW. The transmitter converts serial CML electrical data into serial optical data compliant with the IEEE 802.3ae standard. The receiver converts serial optical data into serial CML electrical data. Digital diagnostics functions are available via a 2-wire serial interface, as specified in SFF-8472.

Specifications

(Tc=-5 °C to 70 °C and Vcc= 3.14 to 3.46V)

Parameter	Symbol	Unit	Min	Typ	Max	Note
Transmitter						
Nominal Wavelength	λ	nm	1464.5		1617.5	
Center wavelength stability	$\Delta\lambda$	nm	-6.5		6.5	
Side Mode Suppression Ratio	SMSR	dB	30			
Spectral Width(-20dB)	$\Delta\lambda$	nm			0.3	
Optical Output Power	P _{av}	dBm	-1		4	
Extinction Ratio	ER	dB	8.2			
Average Launch Power of OFF Transmitter	POFF	dBm			-30	
Receiver						
Center Wavelength	λ_C	nm	1260		1620	
Receiver Sensitivity	RSENS _E	dBm			-16.0	1
Receiver Sensitivity with 40KM fiber @10.3125Gbps	1471~1551nm	dBm			-14.0	1
	1571~1611nm				-13.0	
Overload		dBm	0.5			
Optical Return Loss		dB	27		-	
LOS Assert	LOSA	dBm	-30			
LOS De-Assert LOS	LOSD	dBm			-17	
LOS Hysteresis		dB	0.5		6	

Note: 1. Sensitivity for 10.3125G PRBS 2³¹-1 and BER better than or equal to 10E-12.

10Gb/s 40Km CWDM SFP+ Transceivers RTXM228-29X

Ordering Information

Part No.	Specifications									Application
	Package	Data rate	Laser	Optical Power	Detector	Sensitivity	Temp	Reach	Other	
RTXM228-29X	SFP+	9.953~11.3G	CWDM-rated EML	-1~+4dBm	PIN	< -16dBm	-5~70℃	40km	CDR DDM	10GBASE-ER/EW 10G SONET&SDH 10G Fiber Channel

Block diagram

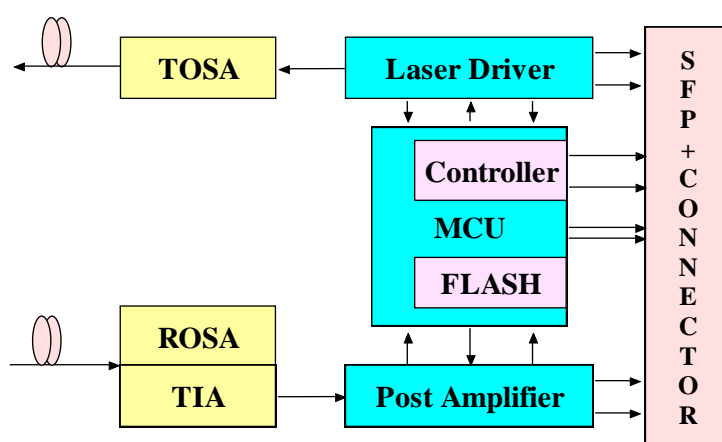


Figure 1. Transceiver functional diagram

Absolute Maximum Ratings

Parameter	Symbol	Unit	Min	Max
Storage Temperature Range	Ts	°C	-40	85
Relative Humidity	RH	%	0	95

Recommended Operating Conditions

Parameter	Symbol	Unit	Min	Typ	Max
Operating Case Temperature Range	Tc	°C	-5		70
Power Supply Voltage	Vcc	V	3.14	3.3	3.46
Bit Rate	BR	Gb/s			11.3
Bit Error Ratio	BER				10 ⁻¹²
Max Supported Link Length	L	Km			40

10Gb/s 40Km CWDM SFP+ Transceivers RTXM228-29X

Electric Ports Definition

Parameter	Symbol	Unit	Min	Typ	Max	Note
Supply Voltage	V _{CC}	V	3.14	3.3	3.46	
Power Consumption	P	W			1.8	
Transmitter						
Input Differential Impedance	R _{IN}	Ω	80	100	120	
Differential Data Input	V _{IN}	mVp-p	150		1200	
Transmit Disable Voltage	V _{DIS}	V	2		V _{CCHOST}	
Transmit Enable Voltage	V _{EN}	V	V _{EE}		V _{EE} +0.8	
Transmit Fault Assert Voltage	V _{FA}	V	2		V _{CCHOST}	
Transmit Fault De-Assert Voltage	V _{FDA}	V	V _{EE}		V _{EE} +0.4	
Receiver						
Differential Data Output	V _{OD}	mVp-p	350		700	
Output Rise Time	t _{RISE}	pS	25			
Output Fall Time	t _{FALL}	pS	25			
LOS Fault	V _{LOSFT}	V	2		V _{CCHOST}	
LOS Normal	V _{LOSNR}	V	V _{EE}		V _{EE} +0.4	

Pin function definitions

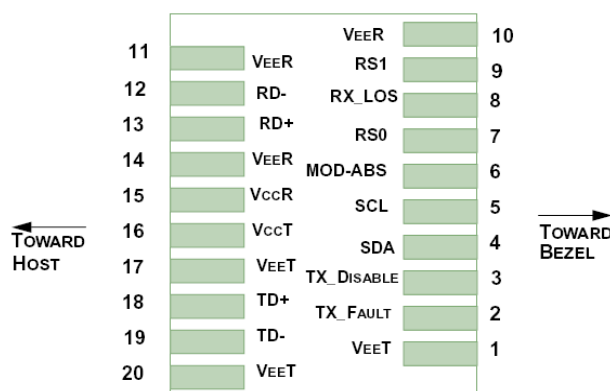


Figure 2.Pin function definitions

Table 1: Transceiver pin descriptions

Pin Number	Symbol	Name	Description
------------	--------	------	-------------

10Gb/s 40Km CWDM SFP+ Transceivers


RTXM228-29X

1,17,20	VeeT	Transmitter Signal Ground	These pins should be connected to signal ground on the host board.
2	TX Fault	Transmitter Fault Out (OC)	Logic "1" Output = Laser Fault (Laser off before t_fault) Logic "0" Output = Normal Operation This pin is open collector compatible, and should be pulled up to Host Vcc with a 10kΩ resistor.
3	TX Disable	Transmitter Disable In (LVTTL)	Logic "1" Input (or no connection) = Laser off Logic "0" Input = Laser on This pin is internally pulled up to VccT with a 10 kΩ resistor.
4	SDA	Module Definition Identifiers	Serial ID with SFF 8472 Diagnostics
5	SCL		Module Definition pins should be pulled up to Host Vcc with 10 kΩ resistors.
6	MOD-ABS		
7	RS0	Receiver Rate Select (LVTTL)	These pins have an internal 30kΩ pull-down to ground. A signal on either of these pins will not affect module performance.
9	RS1	Transmitter Rate Select (LVTTL)	
8	LOS	Loss of Signal Out (OC)	Sufficient optical signal for potential $BER < 1 \times 10^{-12}$ = Logic "0" Insufficient optical signal for potential $BER < 1 \times 10^{-12}$ = Logic "1" This pin is open collector compatible, and should be pulled up to Host Vcc with a 10kΩ resistor.
10,11,14	VeeR	Receiver Signal Ground	These pins should be connected to signal ground on the host board.
12	RD-	Receiver Negative DATA Out (CML)	Light on = Logic "0" Output Receiver DATA output is internally AC coupled and series terminated with a 50Ω resistor.
13	RD+	Receiver Positive DATA Out (CML)	Light on = Logic "1" Output Receiver DATA output is internally AC coupled and series terminated with a 50Ω resistor.
15	VccR	Receiver Power Supply	This pin should be connected to a filtered +3.3V power supply on the host board. See Figure 3.Recommended power supply filter
16	VccT	Transmitter Power Supply	This pin should be connected to a filtered +3.3V power supply on the host board. See Figure 3.Recommended power supply filter
18	TD+	Transmitter Positive DATA In (CML)	Logic "1" Input = Light on Transmitter DATA inputs are internally AC coupled and terminated with a differential 100Ω resistor.
19	TD-	Transmitter Negative DATA In (CML)	Logic "0" Input = Light on Transmitter DATA inputs are internally AC coupled and terminated with a differential

10Gb/s 40Km CWDM SFP+ Transceivers RTXM228-29X


100Ω resistor.

Typical Application Circuit

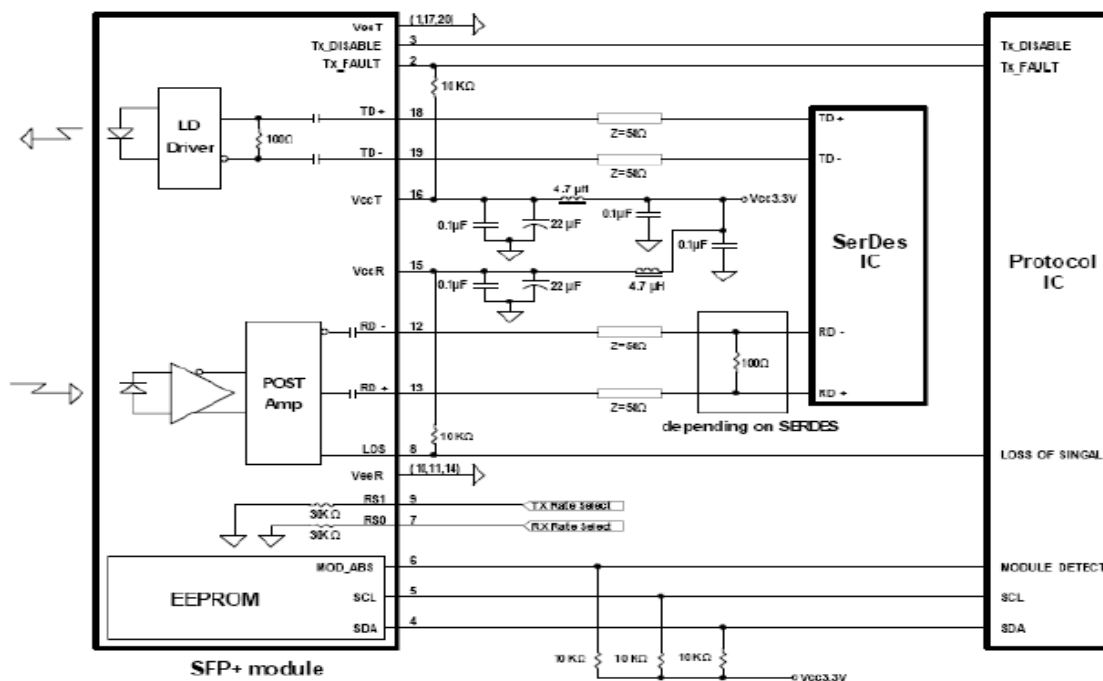

Package Outline

10Gb/s 40Km CWDM SFP+ Transceivers RTXM228-29X

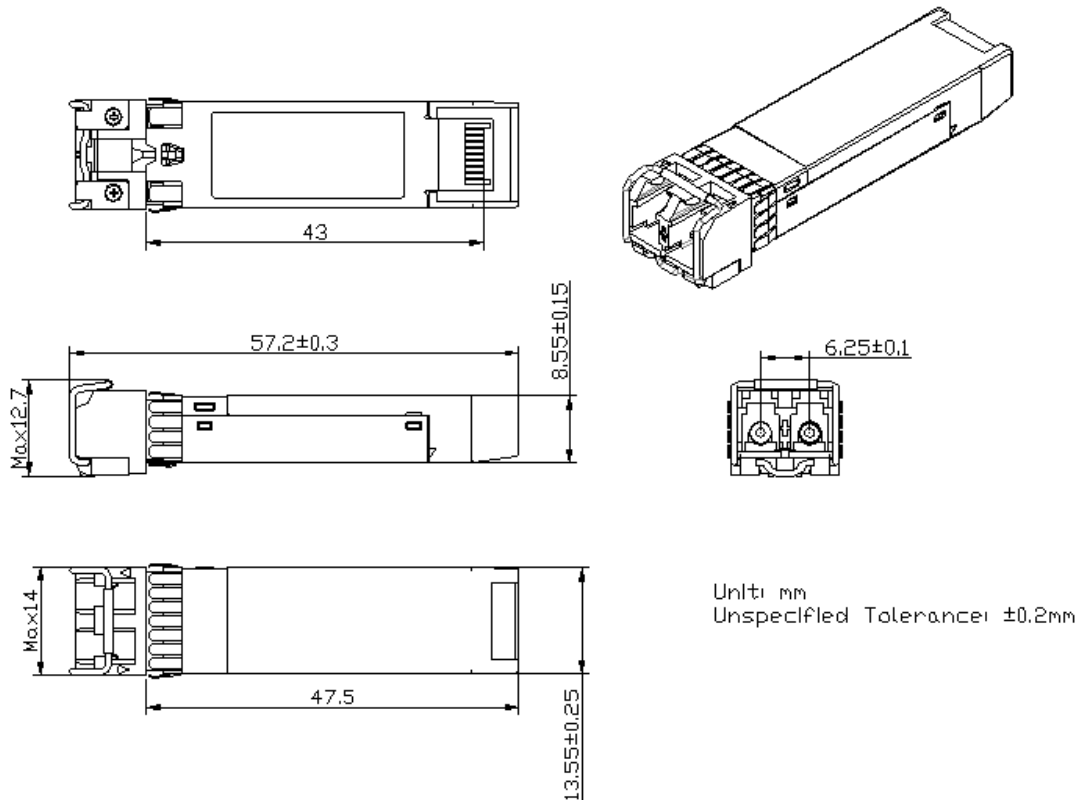

Regulatory Compliance

Feature	Test Method	Performance
Electrostatic Discharge (ESD) to the Electrical Pins	MIL-STD-883C Method 3015.7	Class 1 (> 1500 Volts)
Electrostatic Discharge (ESD) to the Duplex LC Receptacle	Variation of IEC 61000-4-2	Typically, no damage occurs with 15 kV when the duplex LC connector receptacle is contacted by a Human Body Model probe.
Electrostatic Interference (EMI)	CISPR22 ITE Class B EN55022 Class B FCC Class B	Compliant with standards
Immunity	IEC61000-4-3 Class 2 EN55024	Typically show no measurable effect from a 3V/m field swept from 80 to 1000MHz applied to the transceiver without a chassis enclosure.
RoHS Compliance		Less than 1000 ppm of cadmium, lead, mercury, hexavalent chromium, polybrominated biphenyls, and polybrominated biphenyl ethers.

Product Code	Center Wavelength(nm)
--------------	-----------------------

10Gb/s 40Km CWDM SFP+ Transceivers

RTXM228-29X

RTXM228-291	1471
RTXM228-292	1491
RTXM228-293	1511
RTXM228-294	1531
RTXM228-295	1551
RTXM228-296	1571
RTXM228-297	1591
RTXM228-298	1611