

10Gb/s 80Km CDR DWDM SFP+ Transceivers RTXM228-3XX



The DWDM-rated cooled EML laser based 10Gigabit FP+ Transceiver is designed to transmit and receive serial optical data over single mode optical fiber with 80Km.

They are compliant with SFF-8431,SFF-8432, 10GFC Rev 4.0, and 10GBASE-ZR/ZW. The transmitter converts serial CML electrical data into serial optical data compliant with the IEEE 802.3ae standard. The receiver converts serial optical data into serial CML electrical data.Digital diagnostics functions are available via a 2-wire serial interface, as specified in SFF-8472.

Features

- Compliant to SFP+ MSA
- Fully RoHS Compliant
- All metal housing for superior EMI performance
- CDR with 9.95 to 11.3Gbps
- Cooled EML DFB Laser
- High sensitivity APD photodiode and TIA
- LC duplex connector
- Hot pluggable 20pin connector
- Low power consumption <2W
- -5℃ to 70℃ operating wide temperature range
- Single +3.3V power supply
- Digital Monitoring SFF-8472 Rev 10.2 compliant
- Real time monitoring of:
Transmitted optical power
Received optical power
Laser bias current
Temperature
Supply voltage

(Tc=-5 ℃ to 70 ℃ and Vcc= 3.14 to 3.46V)

Parameter	Symbol	Unit	Min	Typ	Max	Note
Transmitter						
Nominal Wavelength	λ	nm	1528		1565	
Center wavelength Spacing		GHz	-	100	-	
Wavelength Tolerance		GHz	-50		50	
Side Mode Suppression Ratio	SMSR	dB	30			
Spectral Width(-20dB)	$\Delta\lambda$	nm			0.3	
Optical Output Power	Pav	dBm	0		4	
Extinction Ratio	ER	dB	8.2			
Average Launch Power of OFF Transmitter	POFF	dBm			-30	
Relative Intensity Noise	RIN	dB/Hz			-128	
Receiver						
Center Wavelength	λ_C	nm	1260		1620	
Receiver Sensitivity@10.3125Gb/s	RSENS E	dBm			-24	1
Receiver Sensitivity at 1600ps/nm @10.3125Gb/s	RSENS E	dBm			-22	1.2
Overload		dBm	-7			
Optical Return Loss		dB	27		-	
LOS Assert	LOSA	dBm	-36			
LOS De-Assert LOS	LOSD	dBm			-27	
LOS Hysteresis		dB	0.5		6	

Applications

- 10G SONET&SDH
- 10GBASE-ZR/ZW
- 10G Fiber Channel

Note 1: Measured at 1528-1565nm,ER>8.2dBm, PRBS $2^{31}-1$ and BER better than or equal to $10E^{-12}$;

2: Loopback using 80km fiber (SMF-28).

10Gb/s 80Km CDR DWDM SFP+ Transceivers RTXM228-3XX

Ordering Information

Part No.	Specifications									Application
	Package	Data rate	Laser	Optical Power	Detector	Sensitivity	Temp	Reach	Other	
RTXM228-3XX	SFP+	9.95~11.3G	DWDM -rated EML	0 ~+4dBm	APD	< -24dBm	-5~70℃	80km	DDM CDR	10G SONET&SDH 10GBASE-ZR/ZW 10G Fiber Channel

Block diagram

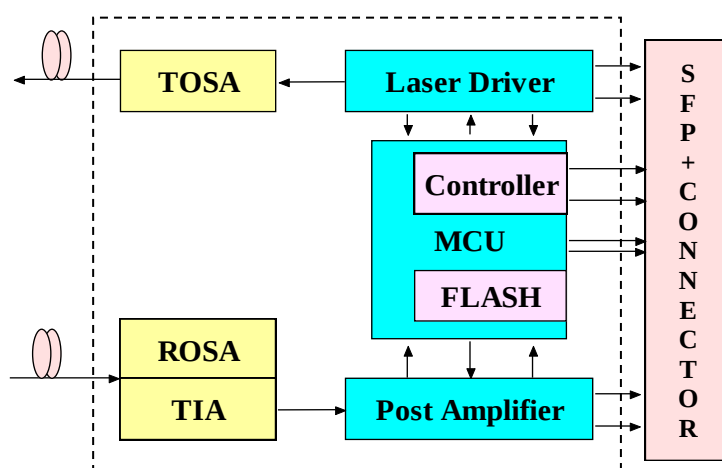


Figure 1. Transceiver functional diagram

Absolute Maximum Ratings

Parameter	Symbol	Unit	Min	Max
Storage Temperature Range	Ts	℃	-40	85
Relative Humidity	RH	%	0	95

Recommended Operating Conditions

Parameter	Symbol	Unit	Min	Typ	Max
Operating Case Temperature Range	Tc	℃	-5		70
Power Supply Voltage	Vcc	V	3.14	3.3	3.46
Bit Rate	BR	Gb/s			11.3
Bit Error Ratio	BER				10 ⁻¹²
Max Supported Link Length	L	Km			80

Electric Ports Definition

Parameter	Symbol	Unit	Min	Typ	Max	Note
Supply Voltage	Vcc	V	3.14	3.3	3.46	
power consumption	Por	W			2	

10Gb/s 80Km CDR DWDM SFP+ Transceivers RTXM228-3XX

Transmitter					
Input Differential Impedance	R_{IN}	Ω	80	100	120
Differential Data Input	V_{IN}	mVp-p	180		700
Transmit Disable Voltage	V_{DIS}	V	2		V_{CCHOST}
Transmit Enable Voltage	V_{EN}	V	V_{EE}		$V_{EE}+0.8$
Transmit Fault Assert Voltage	V_{FA}	V	2		V_{CCHOST}
Transmit Fault De-Assert Voltage	V_{FDA}	V	V_{EE}		$V_{EE}+0.4$
Receiver					
Differential Data Output	V_{OD}	mVp-p	300		850
Output Rise Time	t_{RISE}	pS	25		
Output Fall Time	t_{FALL}	pS	25		
LOS Fault	V_{LOSFT}	V	2		V_{CCHOST}
LOS Normal	V_{LOSNR}	V	V_{EE}		$V_{EE}+0.4$

Pin function definitions

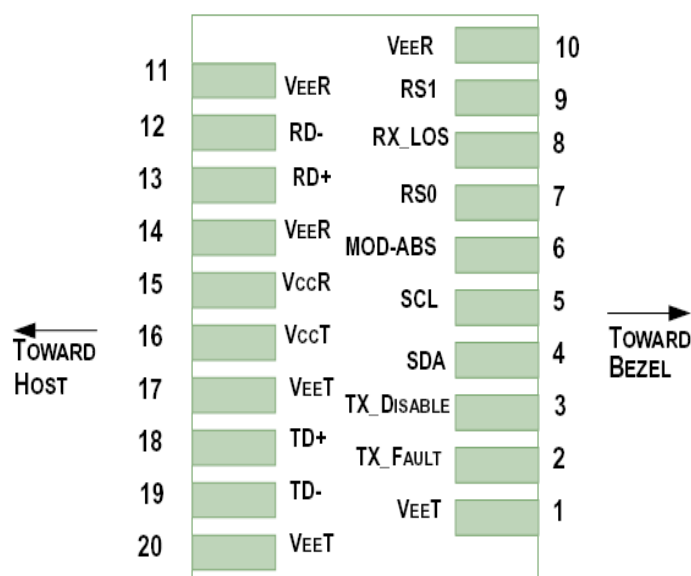


Figure 2.Pin function definitions

Table 1: Transceiver pin descriptions

Pin Number	Symbol	Name	Description
1,17,20	$V_{EE}T$	Transmitter Signal Ground	These pins should be connected to signal ground on the host board.
2	TX Fault	Transmitter Fault Out (OC)	Logic "1" Output = Laser Fault (Laser off before t_{fault}) Logic "0" Output = Normal Operation


10Gb/s 80Km CDR DWDM SFP+ Transceivers

RTXM228-3XX


			This pin is open collector compatible, and should be pulled up to Host Vcc with a 10kΩ resistor.
3	TX Disable	Transmitter Disable In (LVTTL)	Logic "1" Input (or no connection) = Laser off Logic "0" Input = Laser on This pin is internally pulled up to VccT with a 10 kΩ resistor.
4	SDA	Module Definition Identifiers	Serial ID with SFF 8472 Diagnostics
5	SCL		Module Definition pins should be pulled up to Host Vcc with 10 kΩ resistors.
6	MOD-ABS		
7	RS0	Receiver Rate Select (LVTTL)	These pins have an internal 30kΩ pull-down to ground. A signal on either of these pins will not affect module performance.
9	RS1	Transmitter Rate Select (LVTTL)	
8	LOS	Loss of Signal Out (OC)	Sufficient optical signal for potential $BER < 1 \times 10^{-12} = \text{Logic "0"}$ Insufficient optical signal for potential $BER < 1 \times 10^{-12} = \text{Logic "1"}$ This pin is open collector compatible, and should be pulled up to Host Vcc with a 10kΩ resistor.
10,11,14	VeeR	Receiver Signal Ground	These pins should be connected to signal ground on the host board.
12	RD-	Receiver Negative DATA Out (CML)	Light on = Logic "0" Output Receiver DATA output is internally AC coupled and series terminated with a 50Ω resistor.
13	RD+	Receiver Positive DATA Out (CML)	Light on = Logic "1" Output Receiver DATA output is internally AC coupled and series terminated with a 50Ω resistor.
15	VccR	Receiver Power Supply	This pin should be connected to a filtered +3.3V power supply on the host board. See Figure 3.Recommended power supply filter
16	VccT	Transmitter Power Supply	This pin should be connected to a filtered +3.3V power supply on the host board. See Figure 3.Recommended power supply filter
18	TD+	Transmitter Positive DATA In (CML)	Logic "1" Input = Light on Transmitter DATA inputs are internally AC coupled and terminated with a differential 100Ω resistor.
19	TD-	Transmitter Negative DATA In (CML)	Logic "0" Input = Light on Transmitter DATA inputs are internally AC coupled and terminated with a differential 100Ω resistor.

10Gb/s 80Km CDR DWDM SFP+ Transceivers RTXM228-3XX

Typical Application Circuit

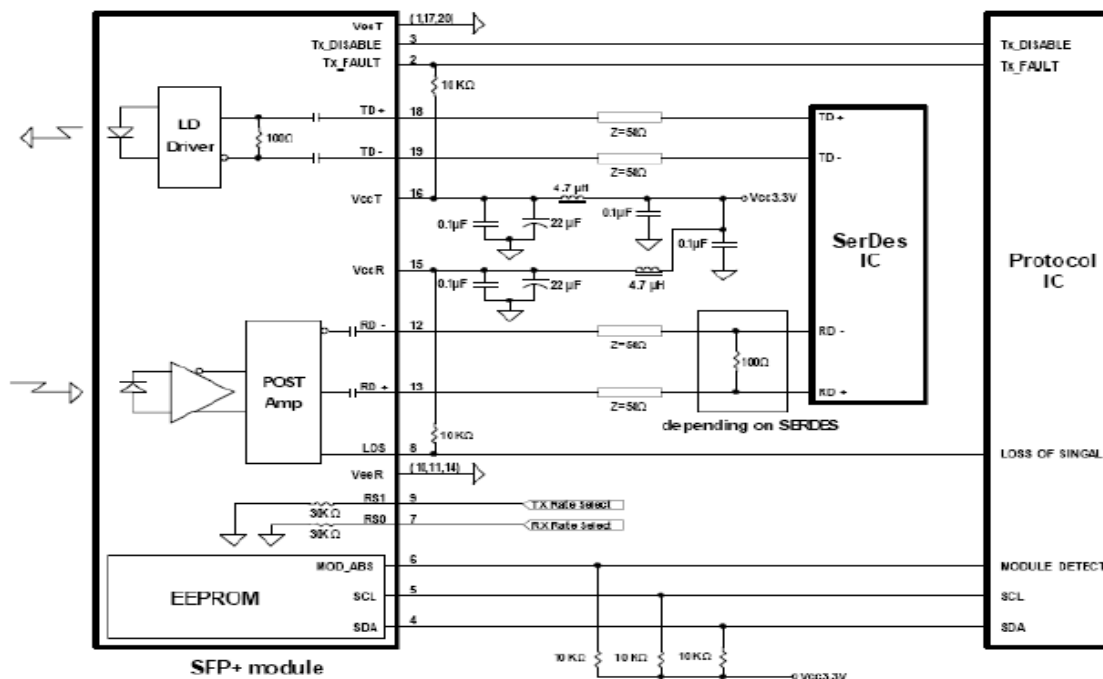

Package Outline

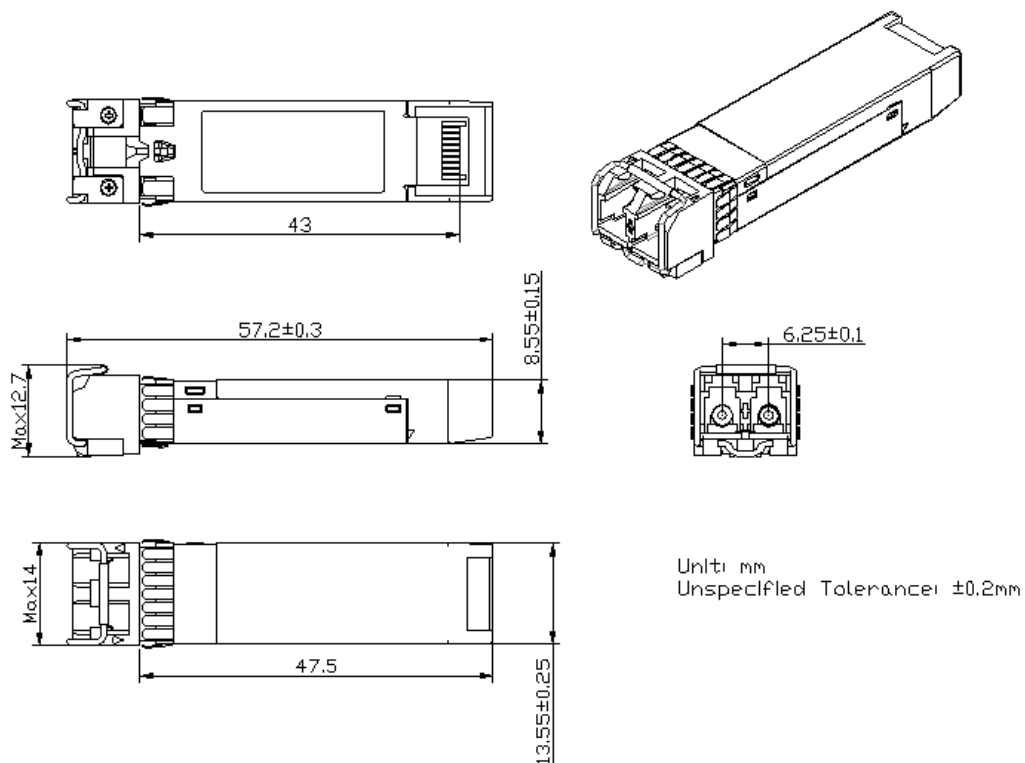

10Gb/s 80Km CDR DWDM SFP+ Transceivers RTXM228-3XX

Regulatory Compliance

Feature	Test Method	Performance
Electrostatic Discharge (ESD) to the Electrical Pins	MIL-STD-883C Method 3015.4	Class1 (>1KV) for high speed I/O pins Class 1 (> 2KV) for all other pins
Electrostatic Discharge (ESD) to the Duplex LC Receptacle	Variation of IEC 61000-4-2	The SFP+ modules meet ESD requirements given in EN61000-4-2, criterion B test specification such that units are subjected to 15kV air discharges during operation and 8kV direct contact discharges to the case.
Electromagnetic Interference (EMI)	CISPR22 ITE Class B EN55022 Class B	Compliant with standards
EMC		FCC Class B/CE Class B
Immunity	IEC61000-4-3 Class 2 EN55024	Typically show no measurable effect from a 3V/m field swept from 80 to 1000MHz applied to the transceiver without a chassis enclosure.
RoHS Compliance		Less than 1000 ppm of cadmium, lead, mercury, hexavalent chromium, polybrominated biphenyls, and polybrominated biphenyl ethers.

Product Code	Frequency(THz)	Center Wavelength(nm)
RTXM228-318	191.80	1563.05
RTXM228-319	191.90	1562.23
RTXM228-320	192.00	1561.42
RTXM228-321	192.10	1560.61
RTXM228-322	192.20	1559.79
RTXM228-323	192.30	1558.98
RTXM228-324	192.40	1558.17
RTXM228-325	192.50	1557.36
RTXM228-326	192.60	1556.55
RTXM228-327	192.70	1555.75
RTXM228-328	192.80	1554.94
RTXM228-329	192.90	1554.13
RTXM228-330	193.00	1553.33
RTXM228-331	193.10	1552.52
RTXM228-332	193.20	1551.72
RTXM228-333	193.30	1550.92
RTXM228-334	193.40	1550.12
RTXM228-335	193.50	1549.32
RTXM228-336	193.60	1548.51
RTXM228-337	193.70	1547.72

10Gb/s 80Km CDR DWDM SFP+ Transceivers

RTXM228-3XX

RTXM228-338	193.80	1546.92
RTXM228-339	193.90	1546.12
RTXM228-340	194.00	1545.32
RTXM228-341	194.10	1544.53
RTXM228-342	194.20	1543.73
RTXM228-343	194.30	1542.94
RTXM228-344	194.40	1542.14
RTXM228-345	194.50	1541.35
RTXM228-346	194.60	1540.56
RTXM228-347	194.70	1539.77
RTXM228-348	194.80	1538.98
RTXM228-349	194.90	1538.19
RTXM228-350	195.00	1537.40
RTXM228-351	195.10	1536.61
RTXM228-352	195.20	1535.82
RTXM228-353	195.30	1535.04
RTXM228-354	195.40	1534.25
RTXM228-355	195.50	1533.47
RTXM228-356	195.60	1532.68
RTXM228-357	195.70	1531.90
RTXM228-358	195.80	1531.12
RTXM228-359	195.90	1530.33
RTXM228-360	196.00	1529.55
RTXM228-361	196.10	1528.77