


Mini connector

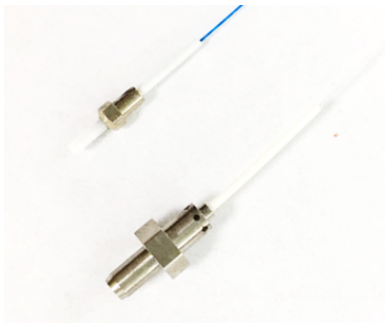

Product Introduction

It can be used in various optical modules.Compared with conventional connectors, the volume can be reduced by more than 50%.It can be customized according to customers’ requirements,can meet the requirements of various packaging.

Features

- Ultra small size
- High reliability, repeatability and stability
- Low insertion loss, high return loss

Applications

- Optical modules

Standards

- YD/T 1272.1-2003
- IEC 61754-20 2012
- GR-326-CORE

Ordering information

OFC – / – / – – – [()]

Connector1	Endface1	Connector2	Endface2	Fiber Type	Fiber Dia.	Fiber Length	Polarity
FC、SC、SC2、ST、MU、LC、LC2	PC、UPC、APC	0:Pigtail, FC、SC、SC2、ST、MU、LC、LC2	0:Pigtail, PC、UPC、APC	S:G.652、A2:G 657A2 M:50/125 D:62.5/125 OM3 OM4	20:Φ 2.0mm、22:Φ 2.0mm zipcord duplex cable、30:Φ 3.0mm 33:Φ 3.0mm zipcord duplex cable	1:1m、10:10m	A : A to A B : A to B Only for duplex connector