

10Gb/s 70Km CWDM SFP+ Transceivers RTXM228-39X



The CWDM-rated cooled EML laser based 10Gigabit SFP+ Transceiver is designed to transmit and receive serial optical data over single mode optical fiber with 70Km.

They are compliant with SFF-8431, SFF-8432, 10GFC Rev 4.0, and 10GBASE-ZR/ZW. The transmitter converts serial CML electrical data into serial optical data compliant with the IEEE 802.3ae standard. The receiver converts serial optical data into serial CML electrical data. Digital diagnostics functions are available via a 2-wire serial interface, as specified in SFF-8472.

Features

- Compliant to SFP+ MSA
- Fully RoHS Compliant
- All metal housing for superior EMI performance
- CDR with 9.95 to 11.3Gbps
- Cooled EML DFB Laser
- High sensitivity APD photodiode and TIA
- LC duplex connector
- Hot pluggable 20pin connector
- Low power consumption <2W
- -5°C to 70°C operating wide temperature range
- Single +3.3V±5% power supply
- Digital Monitoring SFF-8472 Rev 10.2 compliant
- Real time monitoring of:
Transmitted optical power
Received optical power
Laser bias current
Temperature
Supply voltage

Applications

- 10G SONET&SDH
- 10GBASE-ZR/ZW
- 10G Fiber Channel

(Tc=-5 °C to 70 °C and Vcc= 3.14 to 3.46V)

Parameter	Symbol	Unit	Min	Typ	Max	Note
Transmitter						
Nominal Wavelength	λ	nm	1464.5		1617.5	
Center wavelength Spacing		nm	-6.5		6.5	
Side Mode Suppression Ratio	SMSR	dB	30			
Spectral Width(-20dB)	$\Delta\lambda$	nm			0.3	
Optical Output Power	Pav	dBm	0		4	
Extinction Ratio	ER	dB	8.2			
Average Launch Power of OFF Transmitter	POFF	dBm			-30	
Relative Intensity Noise	RIN	dB/Hz			-128	
Receiver						
Center Wavelength	λ_C	nm	1260		1620	
Receiver Sensitivity@10.3125Gb/s	RSENSE	dBm			-24	1
Receiver Sensitivity at 70km @ 1471~1551nm	RSENSE	dBm			-21	2
Receiver Sensitivity at 70km @ 1571~1611nm	RSENSE	dBm			-20	2
Overload		dBm	-7			
Optical Return Loss		dB	27		-	
LOS Assert	LOSA	dBm	-36			
LOS De-Assert LOS	LOSD	dBm			-27	
LOS Hysteresis		dB	0.5		6	

Note 1: Measured at 1470-1610nm, ER>8.2dBm, PRBS 2³¹-1 and BER better than or equal to 10E-12;

2: loopback using 70km fiber (SMF-28)@10.3125Gbps.

10Gb/s 70Km CWDM SFP+ Transceivers

RTXM228-39X

Power consumption	Por	W	2		
Transmitter					
Input Differential Impedance	R _{IN}	Ω	80	100	120
Differential Data Input	V _{IN}	mVp-p	150	1200	
Transmit Disable Voltage	V _{DIS}	V	2	V _{CCHOST}	
Transmit Enable Voltage	V _{EN}	V	V _{EE}	V _{EE} +0.8	
Transmit Fault Assert Voltage	V _{FA}	V	2	V _{CCHOST}	
Transmit Fault De-Assert Voltage	V _{FDA}	V	V _{EE}	V _{EE} +0.4	
Receiver					
Differential Data Output	V _{OD}	mVp-p	350	700	
Output Rise Time	t _{RISE}	pS	25		
Output Fall Time	t _{FALL}	pS	25		
LOS Fault	V _{LOSFT}	V	2	V _{CCHOST}	
LOS Normal	V _{LOSNR}	V	V _{EE}	V _{EE} +0.4	

Pin function definitions

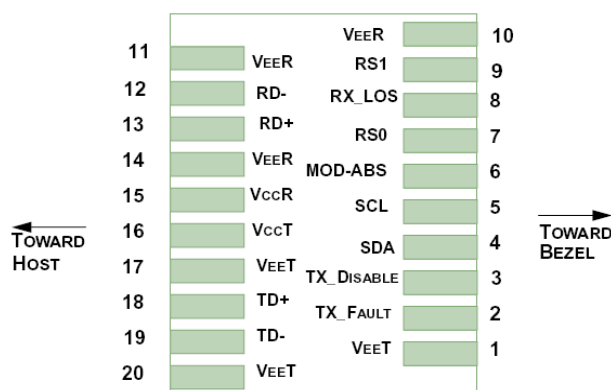


Figure 2.Pin function definitions

Table 1: Transceiver pin descriptions

Pin Number	Symbol	Name	Description
1,17,20	VeeT	Transmitter Signal Ground	These pins should be connected to signal ground on the host board.
2	TX Fault	Transmitter Fault Out (OC)	Logic "1" Output = Laser Fault (Laser off before t_{fault}) Logic "0" Output = Normal Operation This pin is open collector compatible, and should be pulled up to Host Vcc with a 10k Ω resistor.
3	TX Disable	Transmitter Disable In (LVTTTL)	Logic "1" Input (or no connection) = Laser off Logic "0" Input = Laser on


10Gb/s 70Km CWDM SFP+ Transceivers

RTXM228-39X


			This pin is internally pulled up to VccT with a 10 kΩ resistor.
4	SDA		Serial ID with SFF 8472 Diagnostics
5	SCL	Module Definition Identifiers	Module Definition pins should be pulled up to Host Vcc with 10 kΩ resistors.
6	MOD-ABS		
7	RS0	Receiver Rate Select (LVTTL)	These pins have an internal 30kΩ pull-down to ground. A signal on either of these pins will not affect module performance.
9	RS1	Transmitter Rate Select (LVTTL)	
8	LOS	Loss of Signal Out (OC)	Sufficient optical signal for potential BER < 1x10 ⁻¹² = Logic “0” Insufficient optical signal for potential BER < 1x10 ⁻¹² = Logic “1” This pin is open collector compatible, and should be pulled up to Host Vcc with a 10kΩ resistor.
10,11,14	VeeR	Receiver Signal Ground	These pins should be connected to signal ground on the host board.
12	RD-	Receiver Negative DATA Out (CML)	Light on = Logic “0” Output Receiver DATA output is internally AC coupled and series terminated with a 50Ω resistor.
13	RD+	Receiver Positive DATA Out (CML)	Light on = Logic “1” Output Receiver DATA output is internally AC coupled and series terminated with a 50Ω resistor.
15	VccR	Receiver Power Supply	This pin should be connected to a filtered +3.3V power supply on the host board. See Figure 3.Recommended power supply filter
16	VccT	Transmitter Power Supply	This pin should be connected to a filtered +3.3V power supply on the host board. See Figure 3.Recommended power supply filter
18	TD+	Transmitter Positive DATA In (CML)	Logic “1” Input = Light on Transmitter DATA inputs are internally AC coupled and terminated with a differential 100Ω resistor.
19	TD-	Transmitter Negative DATA In (CML)	Logic “0” Input = Light on Transmitter DATA inputs are internally AC coupled and terminated with a differential 100Ω resistor.

10Gb/s 70Km CWDM SFP+ Transceivers RTXM228-39X

Typical Application Circuit

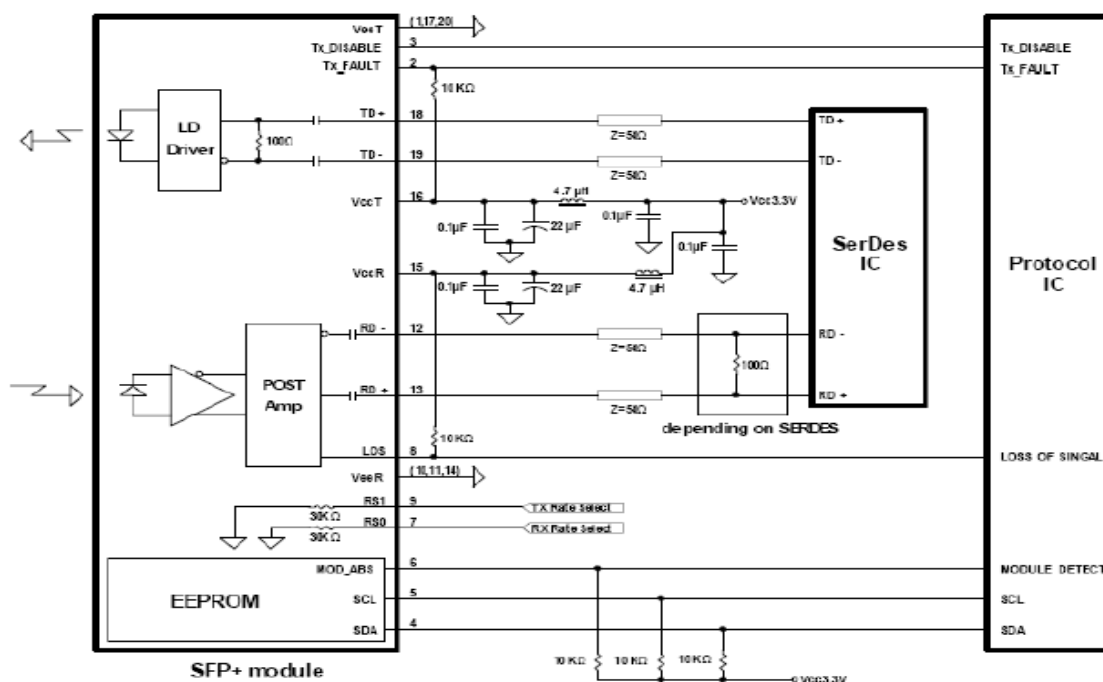

Package Outline

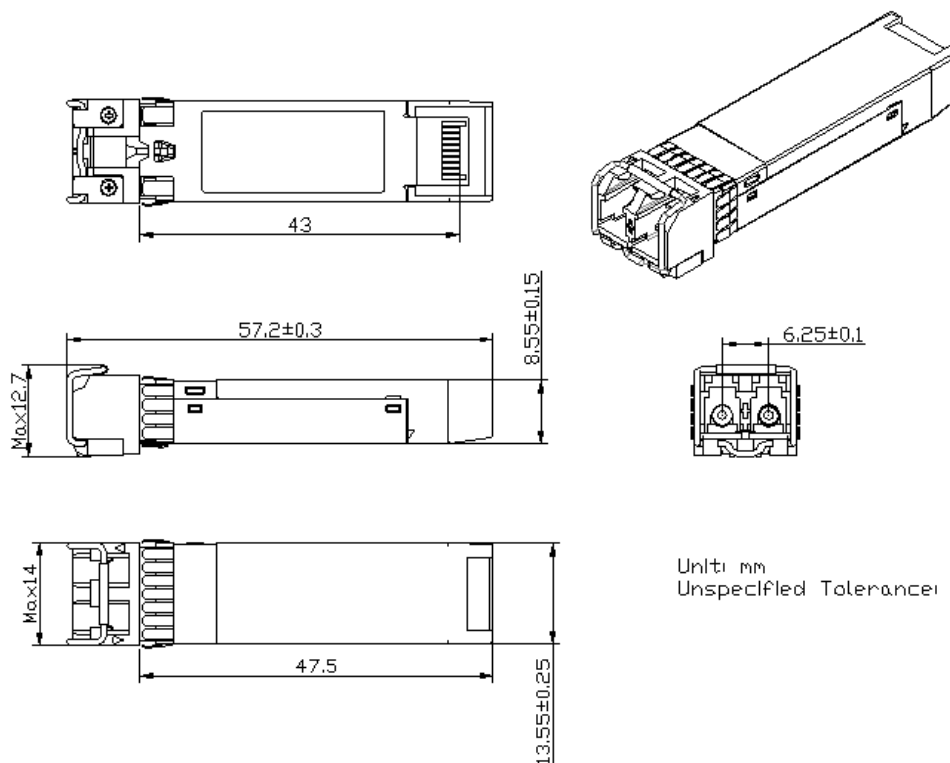

Unit: mm
Unspecified Tolerance: ±0.2mm

10Gb/s 70Km CWDM SFP+ Transceivers RTXM228-39X

Regulatory Compliance

Feature	Test Method	Performance
Electrostatic Discharge (ESD) to the Electrical Pins	MIL-STD-883C Method 3015.7	Class 1 (> 1500 Volts)
Electrostatic Discharge (ESD) to the Duplex LC Receptacle	Variation of IEC 61000-4-2	Typically, no damage occurs with 15 kV when the duplex LC connector receptacle is contacted by a Human Body Model probe.
Electrostatic Interference (EMI)	CISPR22 ITE Class B EN55022 Class B FCC Class B	Compliant with standards
Immunity	IEC61000-4-3 Class 2 EN55024	Typically show no measurable effect from a 3V/m field swept from 80 to 1000MHz applied to the transceiver without a chassis enclosure.
RoHS Compliance		Less than 1000 ppm of cadmium, lead, mercury, hexavalent chromium, polybrominated biphenyls, and polybrominated biphenyl ethers.

Product Code	Center Wavelength(nm)
RTXM228-391	1471
RTXM228-392	1491
RTXM228-393	1511
RTXM228-394	1531
RTXM228-395	1551
RTXM228-396	1571
RTXM228-397	1591
RTXM228-398	1611